


Links And Rings

- Forged from special bar quality carbon and alloy steels.
- Weldless



G-341 S-341
WELDLESS SLING LINKS

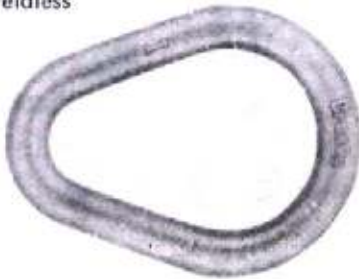

S-643
Weldless Rings meet
Federal Specification
RR-C271b Type VI
forged steel, quenched and tempered.



A-342

MASTER LINK

- Alloy steel quenched and tempered.
- Individually proof tested.
- Proof test certification shipped with each link.
- Sizes from 1/2" to 2" are drop forged.

Weldless Sling Links

Diameter Stock Inches	Inside Length Inches	Inside Width Small End	Inside Width Large End	Weight Pounds Each	Safe Working Load.* Single Pull Pounds
3/8	2 1/4	3/4	1 1/2	.25	1600
1/2	3	1	2	.55	2900
5/8	3 3/4	1 1/4	2 1/2	1.10	4200
3/4	4 1/2	1 1/2	3	1.95	6000
7/8	5 1/4	1 3/4	3 1/2	2.78	8300
1	6	2	4	4.30	10800
1 1/4	7 3/4	2 1/2	5	8.50	16750
1 3/8	8 1/4	2 3/4	5 1/2	12.04	20500

* Minimum Ultimate Load is 6 times the Safe Working Load.

Weldless Rings

DIMENSIONS		Weight Pounds Each	Safe Working Load.* Single Pull Pounds
Diameter Stock Inches	Inside Diameter Inches		
7/8	4	2.70	7200
7/8	5 1/2	3.40	5600
1	4	3.50	10800
1 1/8	6	6.50	10400
1 1/4	5	7.00	17000
1 3/8	6	10.63	19000

* Minimum Ultimate Load is 6 times the Safe Working Load.

Weldless End Links

Stock Size	Working Load Limit* Single Pull-Pounds	Dimensions in Inches		Weight Pounds Each
		Inside Length	Inside Width	
1/2	4,100	5	2 1/2	.81
5/8	5,500	6	3	1.5
3/4	8,600	5 1/2	2 3/4	2.
1	20,300	7	5 1/2	4.6
1 1/4	29,300	8 3/4	4 3/8	9.2
1 1/2	39,900	10 1/2	5 1/4	15.7
1 3/4	52,100	12	6	24.5
2	81,400	14	7	38.1
2 1/4	99,500	16	8	54.8
2 1/2	122,750	16	8	71.6
2 3/4	148,500	16	9 1/2	87.7

*Ultimate Load is 6 times the Working Load Limit

†Welded Master Link

Drop Forged Weldless Rings

Normalized after Manufacture.

MILD STEEL

No. 601	Self Colour.	No. 602	Galvanized.
Diam. of Ring	1/2" 3/4" 1" 1 1/4" 1 1/2" 2"	1" 1 1/4" 1 1/2" 2" 2 1/4" 3"	1" 1 1/4" 1 1/2" 2" 2 1/4" 3"
Inside Diam.	2" 2 1/4" 2 1/2" 3" 3 1/4" 4"	2 1/4" 2 3/4" 3" 3 1/4" 3 3/4" 4 1/4"	2 1/4" 2 3/4" 3" 3 1/4" 3 3/4" 4 1/4"
Diam. of Ring	1" 1 1/4" 1 1/2" 2" 2 1/4" 3"	1 1/4" 1 1/2" 1 3/4" 2 1/4" 2 1/2" 3 1/4"	1 1/4" 1 1/2" 1 3/4" 2 1/4" 2 1/2" 3 1/4"
Inside Diam.	3" 3 1/4" 3 1/2" 4" 4 1/4" 5"	3 1/4" 3 3/4" 4" 4 1/4" 4 3/4" 5 1/4"	3 1/4" 3 3/4" 4" 4 1/4" 4 3/4" 5 1/4"
Diam. of Ring	1 1/4" 1 1/2" 1 3/4" 2" 2 1/4" 3"	1 1/2" 1 3/4" 2" 2 1/4" 2 1/2" 3 1/4"	1 1/2" 1 3/4" 2" 2 1/4" 2 1/2" 3 1/4"
Inside Diam.	4 1/4" 4 1/2" 4 3/4" 5 1/4" 5 1/2" 6 1/4"	4 1/2" 4 3/4" 5" 5 1/4" 5 1/2" 6 1/4"	4 1/2" 4 3/4" 5" 5 1/4" 5 1/2" 6 1/4"
Diam. of Ring	1 3/4" 2" 2 1/4" 3" 3 1/4" 4"	2" 2 1/4" 2 1/2" 3 1/4" 3 1/2" 4 1/4"	2" 2 1/4" 2 1/2" 3 1/4" 3 1/2" 4 1/4"
Inside Diam.	6 1/4" 6 1/2" 6 3/4" 7 1/4" 7 1/2" 8 1/4"	6 1/2" 6 3/4" 7" 7 1/4" 7 1/2" 8 1/4"	6 1/2" 6 3/4" 7" 7 1/4" 7 1/2" 8 1/4"