


Wire Rope Thimbles

Nominal Size (Dia. of rope)	For Ropes sized by circ.	A	B	C	D	E	F	G	J	K	Q
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
8	25	22	38	13	33	54	8	4	64	4	30
10	32	25	48	14	38	64	10	6	76	5	35
11	38	29	54	17	41	73	13	8	76	5	38
13	41	32	59	21	44	79	14	8	89	6	43
14	44	32	59	21	44	79	14	8	89	6	43
16	51	41	75	22	59	98	16	9	114	8	57
17	57	44	79	29	67	108	19	10	127	8	60
19	60	51	92	29	73	124	21	11	152	10	70
21	64	51	92	29	73	124	21	11	152	10	70
22	70	57	102	32	83	133	22	13	165	10	76
24	76	64	110	33	92	146	25	13	178	10	84
25	83	70	119	35	108	162	27	14	203	10	90
29	89	76	133	38	111	178	29	16	229	13	102
32	102	95	152	41	133	197	31	16	254	13	121
35	114	105	175	48	152	229	38	19	305	16	137
38	127	114	197	54	165	254	41	24	330	17	149
41	133	114	197	56	165	254	43	24	330	17	149
44	140	127	229	57	178	286	51	25	356	25	178
48	152	133	248	67	190	318	60	29	381	29	190
51	159	140	257	70	203	330	64	30	406	29	197
54	165	140	257	70	203	330	64	30	406	29	197
57	178	146	270	76	216	356	67	32	432	30	206
64	203	159	311	95	241	413	70	44	457	32	222

ORDINARY THIMBLES

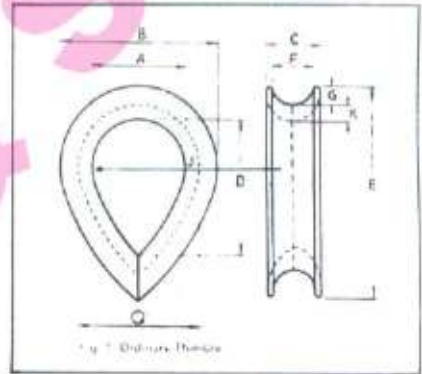

NOTE. For wire ropes of intermediate sizes the next larger size of thimble shall be used.
* These minimum dimensions apply to thimbles of nominal sizes from $\frac{1}{8}$ in. (8mm) to $1\frac{1}{2}$ in. (41mm)

EXTRA HEAVY WIRE ROPE THIMBLES

Galvanized and Stainless Steel

For Rope Diam. Inches	DIMENSIONS IN INCHES						Weight Pounds Per 100
	Overall Length	Overall Width	Length Inside	Width Inside	Overall Thick- ness	Max. Pin Diam.	
* $\frac{1}{4}$	2 $\frac{3}{16}$	1 $\frac{1}{2}$	1 $\frac{1}{8}$	$\frac{3}{8}$	$\frac{13}{32}$	$\frac{13}{16}$	7.5
* $\frac{5}{16}$	2 $\frac{1}{2}$	1 $\frac{13}{16}$	1 $\frac{1}{8}$	1 $\frac{1}{16}$	$\frac{1}{2}$	$\frac{13}{16}$	14.
* $\frac{3}{8}$	2 $\frac{3}{8}$	2 $\frac{1}{8}$	2 $\frac{1}{8}$	1 $\frac{1}{8}$	$\frac{21}{32}$	1 $\frac{1}{16}$	25.
* $\frac{7}{16}$	3 $\frac{1}{4}$	2 $\frac{3}{8}$	2 $\frac{3}{8}$	1 $\frac{1}{4}$	$\frac{3}{4}$	1 $\frac{1}{16}$	36.
* $\frac{1}{2}$	3 $\frac{3}{8}$	2 $\frac{3}{4}$	2 $\frac{3}{4}$	1 $\frac{1}{2}$	$\frac{27}{32}$	1 $\frac{7}{16}$	51.
* $\frac{9}{16}$	3 $\frac{5}{8}$	2 $\frac{11}{16}$	2 $\frac{3}{4}$	1 $\frac{1}{2}$	$\frac{29}{32}$	1 $\frac{1}{16}$	51.
* $\frac{5}{8}$	4 $\frac{1}{4}$	3 $\frac{1}{8}$	3 $\frac{1}{4}$	1 $\frac{3}{4}$	1	1 $\frac{1}{8}$	75.
* $\frac{3}{4}$	5	3 $\frac{3}{8}$	3 $\frac{3}{4}$	2	1 $\frac{1}{4}$	1 $\frac{3}{8}$	147.
* $\frac{7}{8}$	5 $\frac{1}{2}$	4 $\frac{1}{4}$	4 $\frac{1}{4}$	2 $\frac{1}{4}$	1 $\frac{3}{8}$	2 $\frac{1}{8}$	185.
* 1	6 $\frac{1}{8}$	4 $\frac{11}{16}$	4 $\frac{1}{2}$	2 $\frac{1}{2}$	1 $\frac{1}{16}$	2 $\frac{3}{8}$	291.66
1 $\frac{1}{8}$ -1 $\frac{1}{4}$	7	5 $\frac{3}{8}$	5 $\frac{1}{8}$	2 $\frac{3}{8}$	1 $\frac{1}{8}$	2 $\frac{3}{8}$	383.33
1 $\frac{1}{4}$ -1 $\frac{3}{8}$	9 $\frac{1}{16}$	6 $\frac{13}{16}$	6 $\frac{1}{2}$	3 $\frac{1}{2}$	2 $\frac{1}{4}$	3 $\frac{1}{4}$	816.66
1 $\frac{3}{8}$ -1 $\frac{1}{2}$	9	7 $\frac{1}{8}$	6 $\frac{1}{4}$	3 $\frac{1}{2}$	2 $\frac{3}{8}$	3 $\frac{3}{8}$	1,166.66
1 $\frac{1}{2}$	11 $\frac{1}{4}$	8 $\frac{1}{8}$	8	4	2 $\frac{3}{4}$	3 $\frac{3}{8}$	1,625.00
1 $\frac{3}{4}$	12 $\frac{3}{16}$	8 $\frac{1}{2}$	9	4 $\frac{1}{2}$	2 $\frac{3}{4}$	4 $\frac{1}{8}$	1,837.50
1 $\frac{7}{8}$ -2	15 $\frac{1}{8}$	10 $\frac{3}{8}$	12	6	3 $\frac{1}{2}$	5 $\frac{1}{8}$	2,575.00
2 $\frac{1}{4}$	17 $\frac{1}{8}$	11 $\frac{1}{8}$	14	7	3 $\frac{3}{4}$	6 $\frac{3}{8}$	3,850.00

SS-414
(STAINLESS
STEEL) * Sizes
available in
Stainless
(304) Steel.



G-414

EXTRA HEAVY
A rugged rope thimble recommended for heavy duty service. Thimbles G-414 meet Federal Specification FF-T-276b Type III.

SOLID WIRE ROPE THIMBLES

For Rope Diam. Inches	DIMENSIONS IN INCHES				Weight Pounds Each
	Overall Length	Overall Width	Thickness	Maximum Pin Diam.	
$\frac{1}{2}$	2 $\frac{3}{16}$	2 $\frac{1}{8}$	$\frac{3}{8}$	1	1.0
$\frac{5}{8}$	4 $\frac{11}{16}$	3 $\frac{3}{8}$	1 $\frac{1}{8}$	1 $\frac{3}{16}$	2.5
$\frac{3}{4}$	4 $\frac{11}{16}$	3 $\frac{3}{8}$	1 $\frac{3}{8}$	1 $\frac{3}{8}$	3.3
$\frac{7}{8}$	6 $\frac{1}{16}$	4 $\frac{1}{2}$	1 $\frac{3}{8}$	1 $\frac{3}{8}$	5.0
1	6 $\frac{1}{16}$	4 $\frac{1}{2}$	1 $\frac{1}{2}$	2	6.5
1 $\frac{1}{8}$	7 $\frac{1}{4}$	5 $\frac{3}{8}$	2 $\frac{1}{16}$	2 $\frac{1}{4}$	8.5
1 $\frac{1}{4}$ -1 $\frac{3}{8}$	7 $\frac{1}{4}$	5 $\frac{3}{8}$	2 $\frac{5}{16}$	2 $\frac{1}{2}$	10.0

S-412

SOLID
Fits open wire rope socket, boom pendant clevis, as well as wedge socket. Graphitic steel in smaller sizes. Larger sizes cast steel.