


# Load Binders

## L-150 STANDARD LOAD BINDERS

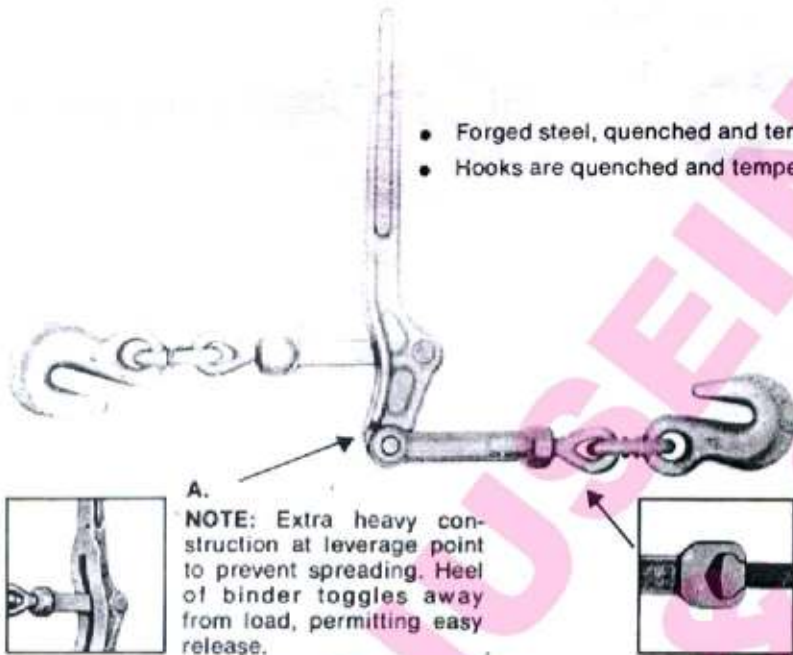

- Forged steel, quenched and tempered.
- Hooks are quenched and tempered alloy steel.


**A.**  
NOTE: Extra heavy construction at leverage point to prevent spreading. Heel of binder toggles away from load, permitting easy release.

**B.**  
Ball and socket swivel joints at hook assemblies permit a straight line pull.

CATALOG NUMBER	MAXIMUM CHAIN SIZE INCHES	HANDLE LENGTH INCHES	TAKE-UP INCHES	WORKING LOAD LIMIT POUNDS	PROOF LOAD POUNDS	MINIMUM ULTIMATE STRENGTH, LBS.	WEIGHT POUNDS EACH
7-1	3/8	16	4 1/2	5400	10800	19000	7.4
A-1	1/2	18 1/2	4 1/2	9200	18400	33000	11.9
C-1	5/8	21	4 3/4	12750	25500	46000	17.5



S-421

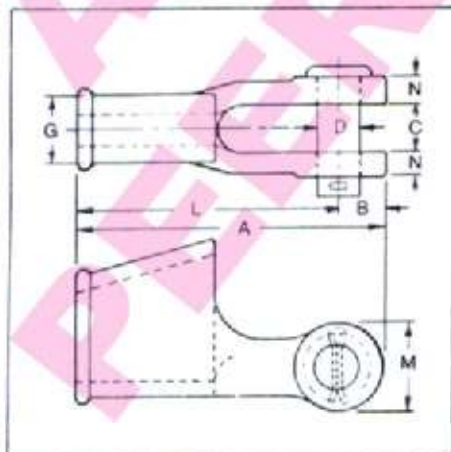

Catalog number S-421 includes wedge. Catalog number S-421W — wedge only.

## OPEN WEDGE SOCKETS Cast Steel

Pin diameter and jaw opening designed to open socket standards. Cast steel with Manganese content, heat treated to resist abrasion.

Wire Rope Diam. ↑ Inches	DIMENSIONS IN INCHES								Weight Pounds Each*
	A	B	C	D	G	L	M	N	
3/8	5 5/8	7/8	1 3/16	1 3/16	1 1/8	4 3/4	1 9/16	7/16	2.25
1/2	6 13/16	1 1/16	1	1	1 3/8	5 3/4	1 15/16	1/2	4.75
5/8	8 5/32	1 7/32	1 1/4	1 3/16	1 3/4	6 15/16	2 1/4	9/16	8.5
3/4	9 25/32	1 13/32	1 1/2	1 3/8	2 1/16	8 3/8	2 5/8	2 1/32	13.6
7/8	11 5/32	1 21/32	1 3/4	1 5/8	2 5/16	9 1/2	3 1/8	3/4	21.75
1	12 3/4	2	2	2	2 9/16	10 3/4	3 3/4	7/8	31.6
1 1/8	14 3/8	2 1/4	2 1/4	2 1/4	2 15/16	12 1/2	4 1/4	1	42.6
1 1/2	16	2 1/2	2 1/2	2 1/2	3 3/16	13 1/2	4 3/4	1 1/8	57.20

†For intermediate wire rope sizes use next larger size socket

\*Weight of socket, wedge and pin.