





High Tensile Shackles


Newly revised JIS Standard (JIS-B2801-1972)




BB Shackle




Body of BA · BB



Body of BC



Body of BD

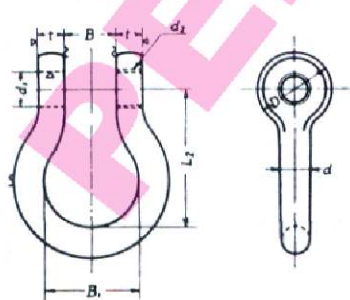

Nom dia	t	d	B	B ₁	D	d ₁	Screw (d ₂)	L	Reference Weight (kg)		
									BA	BB	BC
6	6	8	11	20	17	9	M 8	36	—	—	—
8	8	10	14	25	21	11	M 10	45	—	—	0.13
10	10	12	17	30	25	13	M 12	54	—	—	0.25
12	12	14	20	35	32	16	M 14	63	—	—	0.37
14	14	16	24	40	36	18	M 16	72	—	—	0.50
16	16	18	26	45	40	20	M 18	80	—	—	0.77
18	18	21	29	53	45	22	M 20	95	—	—	1.2
20	20	23	31	58	50	25	M 24	104	—	1.94	1.7
22	22	26	34	65	55	27	M 24	117	—	2.4	2.1
24	24	28	39	70	62	31	M 30	126	—	3.3	2.9
26	26	30	41	75	66	33	M 30	135	—	4.2	3.4
28	28	32	43	80	70	35	M 33	144	—	4.6	4.2
30	30	34	45	85	75	37	M 36	153	—	5.8	5.0
32	32	37	48	93	80	39	M 36	167	—	7.4	6.4
34	34	39	50	98	85	41	M 39	176	8.4	8.5	7.5
36	36	42	54	105	90	43	M 42	190	9.5	10.2	9.5
38	38	44	57	110	95	47	M 45	198	12.0	12.7	11.4
40	40	47	60	118	100	49	M 48	212	15.0	15.9	13.7
42	42	49	63	123	105	53	M 48	220	16	17	—
44	44	51	66	128	110	56	M 48	230	18	18.9	—
46	46	53	68	133	115	58	M 48	240	20	20.8	—
48	48	55	72	138	120	60	M 56	248	21	24.2	—
50	50	57	75	143	125	62	M 56	257	27	27.8	—
55	55	62	83	155	138	67	M 64	280	34	35.7	—
60	60	69	90	178	150	72	M 64	310	43	46	—
65	65	75	98	188	164	79	M 72 × 6	338	56	59	—
70	70	81	105	202	178	85	M 80 × 6	360	75	79	—
75	75	87	112	218	192	92	M 80 × 6	387	85	91	—
80	80	93	120	232	206	96	M 90 × 6	414	105	113	—
85	85	99	128	248	220	104	M 90 × 6	440	119	126	—
90	90	104	135	260	232	110	M 100 × 6	473	152	161	—

Nom dia	t	d	B	B ₁	D	d ₁	Screw (d ₂)	L ₂	Reference Weight (kg)
6	6	8	12	24	17	9	M 8	36	0.06
8	8	10	16	30	24	11	M 10	45	0.14
10	10	12	20	36	28	13	M 12	54	0.27
12	12	14	24	42	32	16	M 14	63	0.38
14	14	16	28	48	35	18	M 16	72	0.53
16	16	18	32	54	40	21	M 20	80	0.9
18	18	20	36	60	45	22	M 20	100	1.2
20	20	22	40	66	50	25	M 24	112	2.17