YACHTING ROPES

Mooring and Anchor Warps

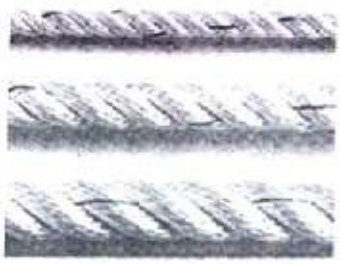

3-strand standard
polyester

Ideal for mooring because its traditional construction gives strength with sufficient stretch as well as supple, hard wearing characteristics. Kink and abrasion resistance are good and it's easy to splice. Rotproof and waterproof, 3-strand standard does a vital job reliably and with realistic economy. On a single point rotating mooring, a swivel fitting is recommended.

Sizes mm	Colours
4 – 32	White
10, 12, 14, 16	Black

3-strand standard polyester

Dia. mm	4	6	8	10	12	14	16	18	20	24
Strength kg.	420	760	1420	2360	3200	3930	5090	7100	7770	11210

Dia. mm	28	32
Strength kg.	14640	18840

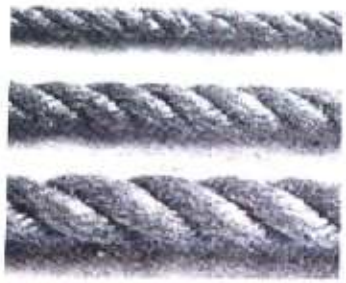

3-strand Hardyhemp
polypropylene

Looks like traditional hemp rope, but isn't. Instead, all the advantages of man-made fibre – reliable, hardwearing and inexpensive.

Sizes mm	Colours
6 – 24	Light brown

3-strand Hardyhemp polypropylene

Dia. mm	6	8	10	12	14	16	18	20	24
Strength kg.	390	640	1030	1470	2020	2870	3330	4470	5940

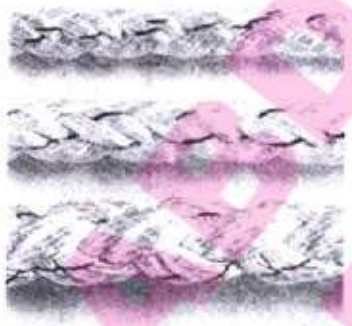

Multiplait
nylon

Ideal for the elasticity and high strength called for in an anchor rope – especially under shock loading. Extremely flexible, multiplait won't kink and is easy to splice direct to chain.

Sizes mm	Colours
10 – 32	White

3-strand Nylon
also available

Sizes mm	Colours
6 – 32	White

Multiplait nylon

Dia. mm	10	12	14	16	18	20	24	28	32
Strength kg.	2770	3800	4670	6640	7270	9890	14370	18550	23930

3-strand Nelson
spunstaple polypropylene

A useful alternative to polyester with an added advantage: it floats. Lightweight with good abrasion-resistance, it is also water and rotproof. You'll find that the hairy finish helps grip too.

Sizes mm	Colours
6 – 32	White

(multiplait available in 12mm)

3-strand Nelson spunstaple polypropylene

Dia. mm	6	8	10	12	14	16	18	20	24	28
Strength kg.	670	1210	1760	2410	3250	4200	4840	6210	8430	10800

Dia. mm	32
Strength kg.	13600

Dock Lines

Marlow's high strength/high stretch braided dock lines have a professionally spliced eye at one end to ensure mooring is safe and secure. The ropes have a nylon core allowing elongation to prevent shock loads being transmitted to cleats and other hardware. The braided polyester cover gives excellent abrasion resistance and flexibility. Pre-packed lengths 5, 6, 8 or 9m, longer lengths available unspliced.

Sizes mm	Colours
12, 14, 16	Red, blue, black or white

Dock Lines

Dia. mm	12	14	16
Strength kg.	4048	5510	7197

3-strand Marstron
multifilament polypropylene

This lightweight, easy to splice rope floats and offers excellent handleability. It's ideal for mooring warps, tender and tender lines and bolt ropes.

Sizes mm	Colours
6 – 16	White

3-strand Marstron

Dia. mm	6	7	8	9	10	12	14	16
Strength kg.	400	620	800	980	1230	1720	2210	3053

Halyards

8-plait pre-stretched
polyester

8-plait version of our 3-strand pre-stretched polyester. The ultimate rope for dinghy halyards and control lines.

Available in two new colours – Harlequin and Caspian Blue.

Sizes mm	Colours
4 – 8	White with orange fleck
4 – 6	Red, blue, pink, lime, harlequin and caspian blue

PRE-STRETCHED ROPE SIZES
During the unique Marlow pre-stretching process the original diameter of the rope is slightly reduced. Sizes indicated are prior to stretching.

8-plait pre-stretched polyester

Dia. mm	4	5	6	7	8
Strength kg.	380	600	790	890	1400

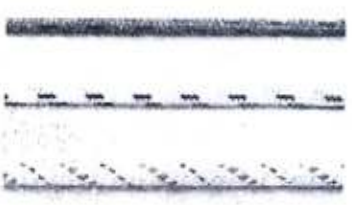

KT3
100% Aramid core

With its high strength and extra low stretch, KT3 is suitable for dinghy main halyards in certain situations.

Sizes mm	Colours
3.5 – 5.5	White with orange fleck
3.5 & 4.5	Flourescent pink or lime

KT3 100% Aramid® core

Dia. mm	3.5	4.5	5.5	6	8	10	12	14	16
Strength kg.	480	630	830	1480	3180	4510	6810	10000	11470

PUBLISHED PERSONAL